

Onsite Chamber Comparison Sheet


Onsite Chambers perform two key functions:

- Provide a means to distribute and dispose of primarily and secondarily treated effluent into the soil.
- Provide adequate storage volume to accommodate incoming flows.


Onsite chambers accomplish this by providing the necessary open bottom area, louvered sidewall, and storage capacity via structural arch design.

Prinsco Pro4® chambers offer equivalent or greater open bottom area and louvered sidewall height compared to existing chambers.

Performance

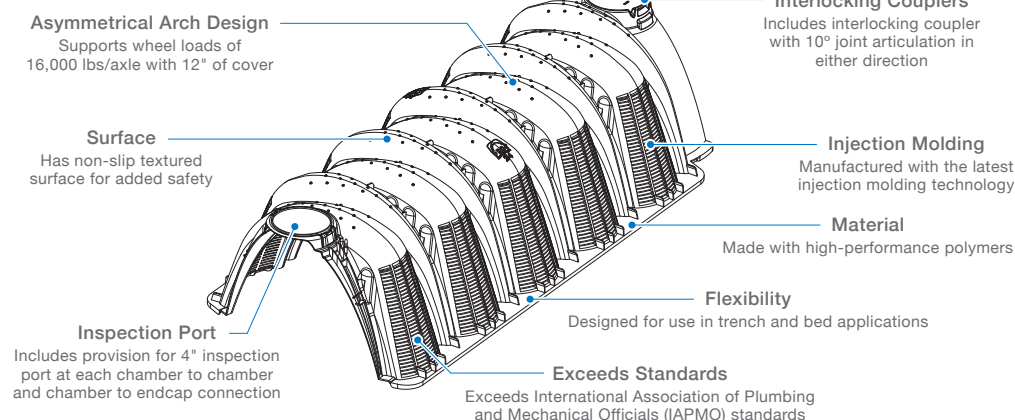

Versatility

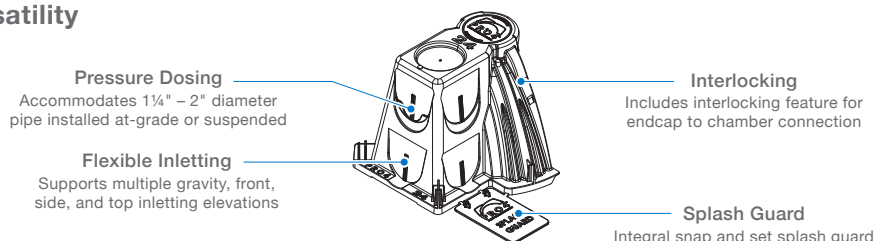

	Prinsco Pro4®/24	IWT Arc 24 ¹	IWT Quick4 EQ36 ¹	IWT Quick5 EQ36 ¹
Height	12"	12"	12"	12"
Width	22"	22.5"	22"	22"
Effective Length	48"	60"	48"	60"
Weight	2.5 lbs/ft	2.6 lbs/ft	2.63 lbs/ft	Not Published
Invert Height	0.5", 6", 7", 12"	6.25"	6"	6"
Louver Height	8.5"	7.5"	10"	10"
Open Bottom Area	1.6 ft ² /ft	1.6 ft ² /ft	1.6 ft ² /ft	Not Published
Storage Capacity	8 gal/ft	7.5 gal/ft	8 gal/ft	8.4 gal/ft
Load Rating	H-10	H-10	H-10	H-10

¹ Infiltrator Water Technology's published values

The trademarks Arc 24, Quick4 Equalizer 36, and Quick5 Equalizer 36 are registered trademarks of Infiltrator Water Technologies, LLC, in which Prinsco, Inc. claims no ownership interest.