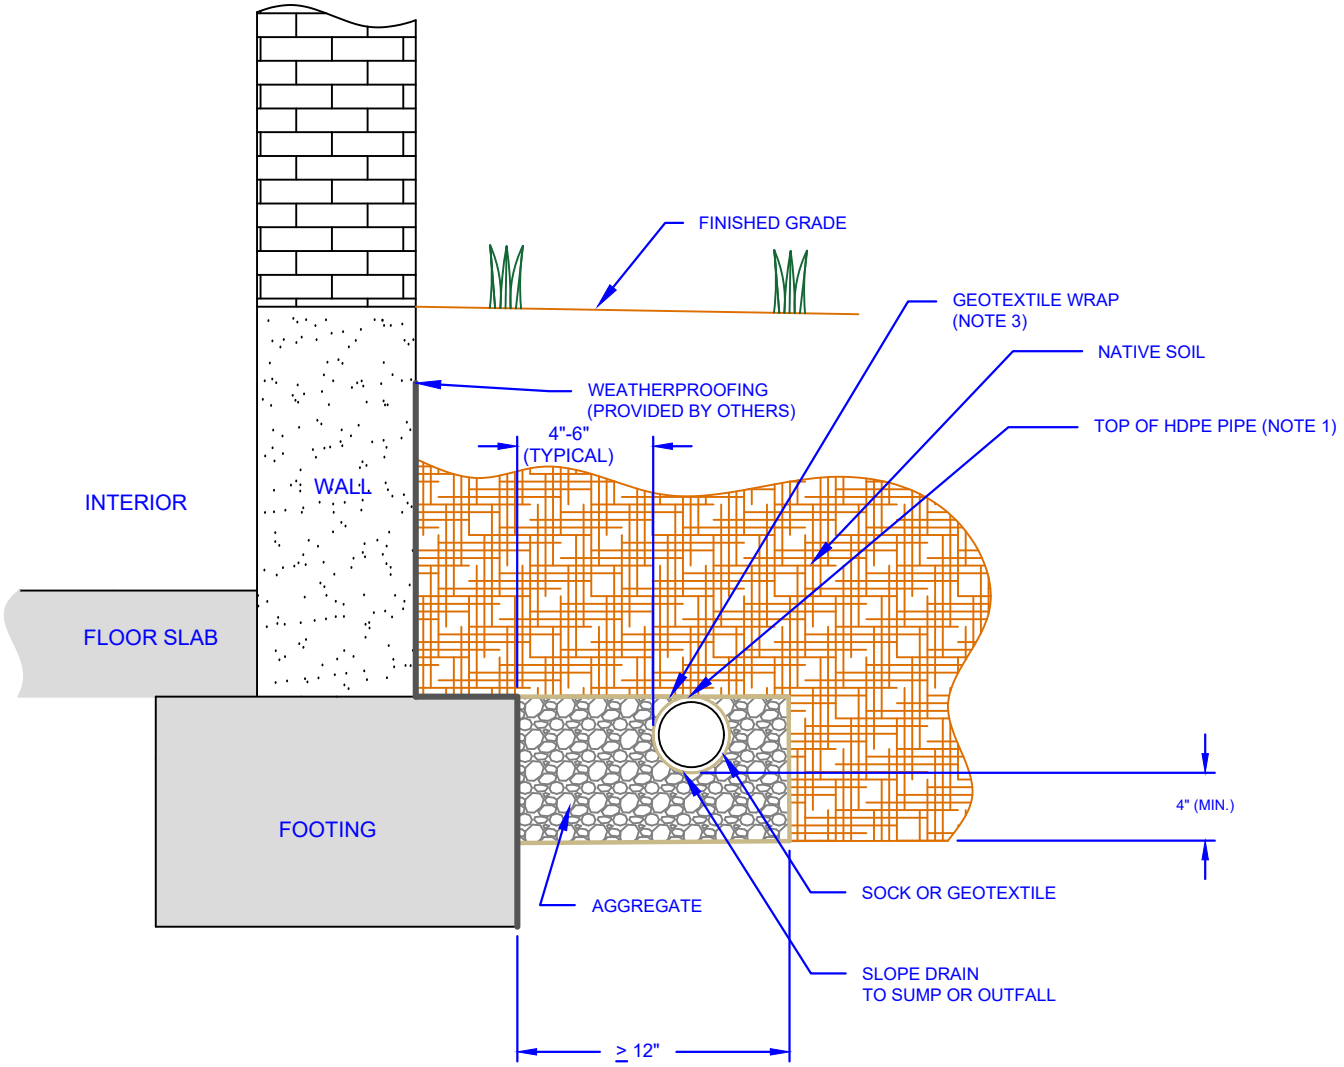


**NOTES:**

1. TOP OF PERFORATED PIPE MUST BE AT OR BELOW THE TOP OF FOOTING
2. A CRUSHED ANGULAR BACKFILL IS RECOMMENDED AROUND THE FOUNDATION DRAIN PIPE
3. IF SOIL MIGRATION INTO THE CRUSHED ROCK BACKFILL IS A CONCERN, A GEOTEXTILE WRAP SHOULD BE USED AROUND THE ROCK.
4. FOR VEHICULAR LOADS, A MINIMUM OF 12-INCHES OF COVER IS REQUIRED OVER THE TOP OF THE PIPE

THIS DETAIL DEPICTS RECOMMENDED INSTALLATION PRACTICES AND IS NOT INTENDED TO SUPERSEDE ANY NATIONAL, STATE OR LOCAL SPECIFICATIONS. PRINSCO BEARS NO RESPONSIBILITY FOR ANY ALTERATIONS, REVISION AND/OR DEVIATION FROM THIS STANDARD DETAIL. PRINSCO HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICE FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION TO VERIFY SUITABILITY. © PRINSCO, INC.

PRINSCO
WATER MANAGEMENT SOLUTIONS
1717 16TH ST. NE
WILLMAR, MN 56201
www.prinsco.com

TITLE: HDPE PIPE- INSTALLATION - FOUNDATION DRAIN

| DRAWN BY: | SSB | DATE: | 17-Jun-20 | DRAWING NUMBER: |
|---|---|---|---|---|
| SCALE: | NTS | SHEET: | 1 OF 1 | D-1-130 |