

GOLDFLO WYE						
Nominal I.D.		Part #	A (in)	B (in)	C (in)	D (in)
(in)	(mm)					
4	100	GFY0404	4.8	13.7	10.4	8.2
6	150	GFY0606	7.1	18.0	14.8	11.1
8	200	GFY0808	9.6	23.5	19.8	14.8
10	250	GFY1010	11.9	30.1	24.6	18.6
12	300	GFY1212	14.4	31.4	28.5	20.6
15	375	GFY1515	17.6	41.8	35.3	26.7
18	450	GFY1818 (MW)	21.5	47.1	42.8	30.9
		GFY1818 (WC)	21.4	47.1	42.6	31.0
24	600	GFY2424 (MW)	28.3	58.9	53.8	37.3
		GFY2424 (WC)	28.1	62.8	56.4	41.4

NOTES:

- All pipe and fittings meet the requirements of AASHTO M294 Standard Specification for HDPE Pipe.
- Actual corrugation counts will vary depending on pipe diameter.
- All fitting dimensions are for reference only and actual dimensions may vary slightly.




DESCRIPTION:

GOLDFLO 45° WYE

DRAWN BY: JAJ

SCALE: NTS

DATE: 03/04/2013

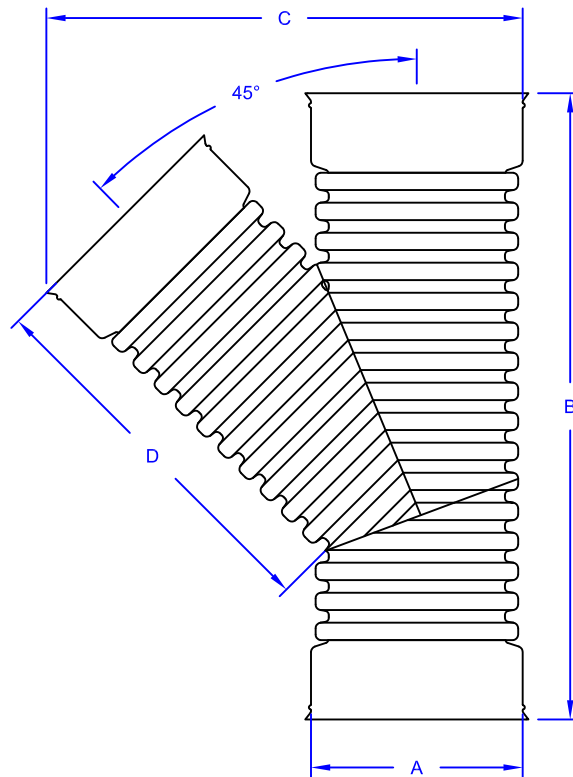

GOLDFLO WYE - BELLED						
Nominal I.D.		Part #	A (in)	B (in)	C (in)	D (in)
(in)	(mm)					
12	300	GFY1212B3	15.1	43.1	34.5	26.4
15	375	GFY1515B3	18.4	54.5	42.0	33.1
18	450	GFY1818B3(MW)	22.1	60.7	49.5	37.7
		GFY1818B3(WC)	22.1	60.6	49.5	37.7
24	600	GFY2424B3(MW)	29.2	75.2	61.6	45.4
		GFY2424B3(WC)	29.2	79.4	65.2	49.6

NOTES:

- All pipe and fittings meet the requirements of AASHTO M294 Standard Specification for HDPE Pipe.
- Actual corrugation counts will vary depending on pipe diameter.
- All fitting dimensions are for reference only and actual dimensions may vary slightly.



DESCRIPTION:

GOLDFLO 45° WYE
12"-24" - BELLED

DRAWN BY: JAJ

SCALE: NTS

DATE: 03/06/2013