


4" (100 mm) TAP TEE  
CONNECTION DETAIL  
(SEE NOTE 1)

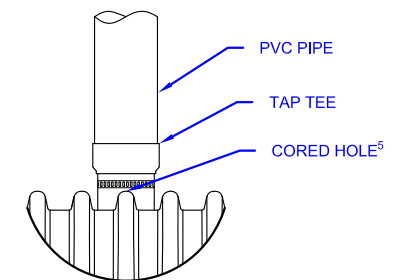

6" (150 mm) & 8" (200 mm) TAP TEE  
CONNECTION DETAIL  
(SEE NOTE 1)

**NOTES:**

1. 4" (100 mm) INSPECTION PORTS MAY BE CONNECTED THROUGH ANY CHAMBER CIRCULAR CUT OUT POINT, LOCATED AT THE CENTER OF EACH HS75 CHAMBER. 6" (150 mm) OR 8" (200 mm) INSPECTION PORTS MAY BE CONNECTED THROUGH A CORED HOLE, CENTERED ON A CORRUGATION.
2. TAP TEE CONNECTION CAN CONSIST OF QWICKSEAL, INSERTA TEE OR APPROVED ENGINEERING EQUIVALENT.
3. ALL PVC FITTINGS TO BE SOLVENT CEMENTED.
4. PVC MAY BE EITHER SDR 35 OR SCH 40
5. CORED HOLE SIZES AS FOLLOWS: 4" (100 mm) CUT TO 5" (125 mm); 6" (150 mm) CUT TO 7" (180 mm); 8" (200 mm) CUT TO 9" (230 mm)

THIS DETAIL DEPICTS RECOMMENDED INSTALLATION PRACTICES AND IS NOT INTENDED TO SUPERSEDE ANY NATIONAL, STATE OR LOCAL SPECIFICATIONS. PRINSCO BEARS NO RESPONSIBILITY FOR ANY ALTERATIONS, REVISION AND/OR DEVIATION FROM THIS STANDARD DETAIL. PRINSCO HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICE FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION TO VERIFY SUITABILITY. © PRINSCO, INC.



1717 16TH ST. NE  
WILLMAR, MN 56201  
www.prinSCO.com

TITLE: HYDROSTOR HS75 - INSPECTION PORT		REV: B
DRAWN BY: ARB	DATE: 05-Jun-17	DRAWING NUMBER:
SCALE: NTS	SHEET: 1 OF 1	D-7-303