HydroStor™ | HS75

Chamber Specifications	
Chamber Size (L x W x H)	87.1" x 51.0" x 29.7" (2,212 x 1,295 x 754 mm)
Installed Length	84.9" (2,156 mm)
Chamber Storage	46.4 ft^3 (1.31 m^3)
Min. Installed Storage*	74.9 ft^3 (2.12 m^3)
Weight / Chamber	70 lbs (31.8 kg)
Chambers / Pallet	33
Approx. Weight / Pallet	2,500 lbs (1,134 kg)

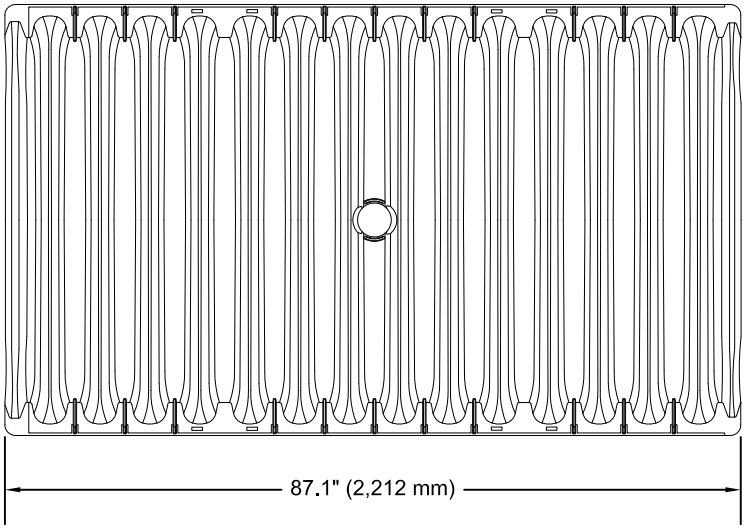

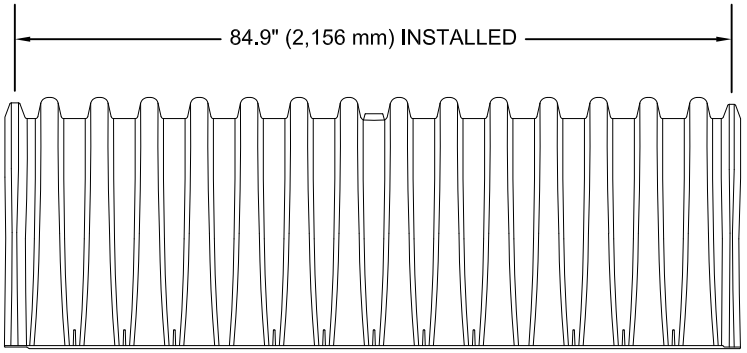

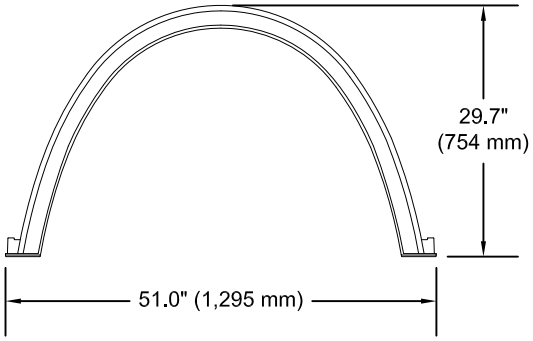

End Cap Specifications	
End Cap Size (L x W x H)	22.0" x 48.3" x 29.4" (559 x 1,227 x 747 mm)
Installed Length	20.4" (518 mm)
End Cap Storage	5.8 ft^3 (0.16 m^3)
Min. Installed Storage*	21.5 ft^3 (0.61 m^3)
Weight	16 lbs (7.26 kg)

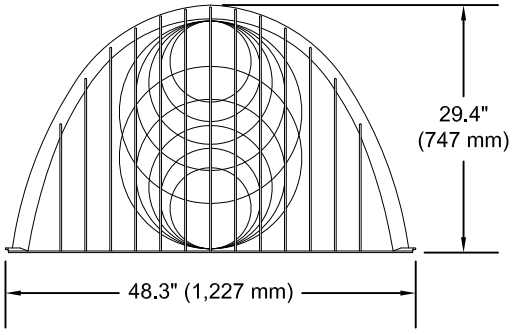

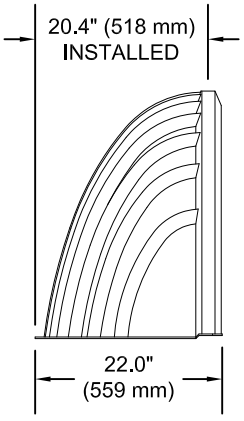

*Assumes 6" (150 mm) stone above chambers/end caps, 6" (150 mm) of stone for foundation, 6" (150 mm) of stone between chambers/end caps, 12" (300 mm) of stone perimeter in front of end caps and 40% stone porosity.

THIS DETAIL DEPICTS RECOMMENDED INSTALLATION PRACTICES AND IS NOT INTENDED TO SUPERSEDE ANY NATIONAL, STATE OR LOCAL SPECIFICATIONS. PRINSCO BEARS NO RESPONSIBILITY FOR ANY ALTERATIONS, REVISION AND/OR DEVIATION FROM THIS STANDARD DETAIL. PRINSCO HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICE FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION TO VERIFY SUITABILITY. © PRINSCO, INC.

PRINSCO
ENGINEERED WITH INTEGRITY
1717 16TH ST. NE I WILLMAR, MN 56201
www.prinsco.com

SPECIFICATION DRAWING
HYDROSTOR HS75 CHAMBER

DRAWN BY:	BMH
DATE:	01/20/2016
SCALE:	NTS
SHEET:	1 OF 1

DRAWING NUMBER: D-7-301