



## Stormwater Solutions / Storage / Chambers

### HydroStor®

Prinsco offers four sizes of high-performance HydroStor® stormwater chambers designed for site-specific applications such as parking lots, roadways and commercial developments. HydroStor chambers provide an environmentally sustainable underground water management system that optimizes groundwater recharge and saves valuable land resources. Our four storm chamber models are designed to fit almost any type of performance specifications, project footprint and construction budget.

**HS290**



**HS180**



**HS75**



**HS31**



Installed Storage Capacity*	164.5 ft³/chamber	176 ft³/chamber	75 ft³/chamber	29.6 ft³/chamber
Height	59.5"	45.5"	29.7"	16"
Width	100.5"	77.8"	51"	34"
Unit Length	51.8"	88.7"	87.1"	87.3"
Installed Length	48.3"	85.3"	84.9"	85.5"
Weight	112 lbs	122 lbs	69 lbs	34 lbs
Chambers/Pallet	10	19	33	90
Material	Polypropylene	Polypropylene	Polypropylene	Polypropylene
Mfg. Process	Injection Molding	Injection Molding	Injection Molding	Injection Molding
Special Features	Integrated Handles	Integrated Handles	Integrated Handles	Low Profile Chamber
ASTM Standards	Meets or Exceeds	Meets or Exceeds	Meets or Exceeds	Meets or Exceeds

\* Assuming 40% void volume of backfill with 9" bedding and 12" cover for HS290 and HS180, and 6" bedding and 6" cover for HS75 and HS31

### Performance

- High performance polypropylene material
- Meets or exceeds **ASTM F2418** product standard and **ASTM F2787** design standard
- Meets **AASHTO H20** live load and **HL93** design load requirements
- Advanced injection molding technology for maximum structural performance


### System Design

- Maximum land utilization and minimal environmental impact
- Design tool available at [Prinsco.com/HydroStor-Resources](http://Prinsco.com/HydroStor-Resources)
- Available as part of a complete solution with end caps, pipe manifolds and pretreatment options


## Handling

- Integrated Handles for safe on-site handling
- Sturdy and lightweight for safe transport and placement by 2 people
- Specially designed pallet for trouble free handling
- Maximum stacking density to reduce on-site staging footprint

Integrated Handles



Easy to Handle




Reinforced Pallet\*



\* minimum 72" forks required

## Installation Specifications

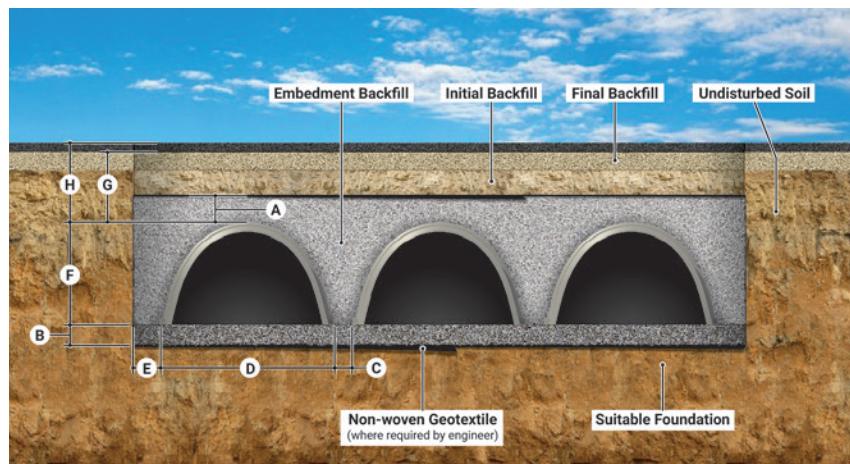

	HS290	HS180	HS75	HS31
<b>A</b> minimum backfill above chamber	12"	12"	6"	6"
<b>B</b> minimum bedding	9"	9"	6"	6"
<b>C</b> chamber spacing	8.5"	5"	6"	3"
<b>D</b> chamber width	100.5"	77.8"	51"	34"
<b>E</b> backfill at edge of system	12"	12"	12"	12"
<b>F</b> chamber height	59.5"	45.5"	29.7"	16"
<b>G</b> minimum cover	24"	18"	18"	16"
<b>H</b> maximum burial depth	8'	8'	8'	8'

## Mobile Resources

### More about HydroStor®

- Installation Videos
- Installation Documents
- Specifications
- Technical Notes



### COLLECTION & CONVEYANCE



**GOLDFLO®**  
AASHTO Dual-Wall Pipe



**GOLDPRO STORM®**  
Dual-Wall HP Polypropylene

### TREATMENT



**STORMWATER QUALITY**  
Engineered Water Treatment

### STORAGE



**HYDROSTOR®**  
Arched Chambers



**UNDERGROUND DETENTION**  
Customized Pipe Systems