



WATER MANAGEMENT / DUAL-WALL

GOLDFLO WT® Integrated Bell & Spigot Dual-Wall


GOLDFLO WT® provides unsurpassed performance for agricultural water management. It is designed and manufactured with state-of-the-art methods ensuring maximum material performance and maximum structural performance.

GOLDFLO WT® is manufactured to the most stringent requirements of AASHTO M294 or ASTM F2306, along with the ASTM D3212 watertight laboratory test requirements, making it ideal for projects where low cost, high installation efficiency, high product quality, and maximum watertight performance are critical.

Performance

GOLDFLO WT® pipe meets the following:


- **ASTM F2306:** Standard Specification for 12" - 60" (300 - 1500 mm) Annular Corrugated Profile-Wall Polyethylene (PE) Pipe and Fittings for Gravity-Flow Storm Sewer and Subsurface Drainage Applications
- **AASHTO M252:** Standard Specification for Corrugated Polyethylene Drainage Pipe
- **AASHTO M294:** Standard Specification for Corrugated Polyethylene Pipe, 300 - 1500 mm diameter
- **ASTM F477:** Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe
- **ASTM D3212:** Standard Specification for Joints for Drain and Sewer Plastic Pipes using Flexible Elastomeric Seals

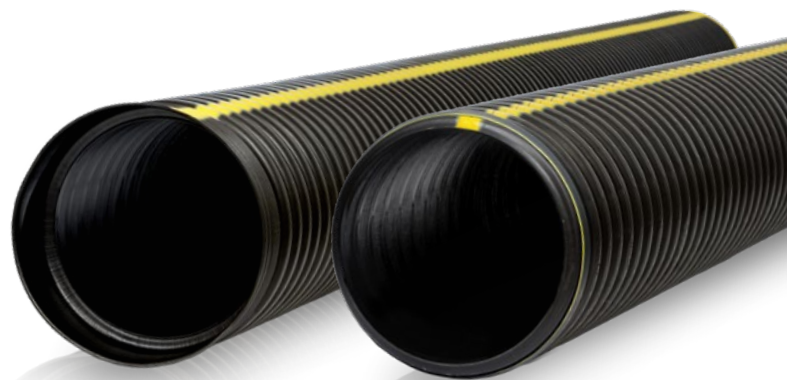

Available Sizes

Diameter (in.)	Number	Nominal Length
4"	04WT20NP	20'
6"	06WT20NP	20'
8"	08WT20NP	20'
10"	10WT20NP	20'
12"	12WT10NP/12WT20NP	10'/20'
15"	15WT10NP/15WT20NP	10'/20'
18"	18WT11NP/18WT20NP	11'/20'
24"	24WT11NP/24WT20NP	11'/20'
30"	30WT11NP/30WT20NP	11'/20'
36"	36WT11NP/36WT20NP	11'/20'
42"	42WT11NP/42WT20NP	11'/20'
48"	48WT11NP/48WT20NP	11'/20'
60"	60WT11NP/60WT20NP	11'/20'

(Pipe is available perforated.)

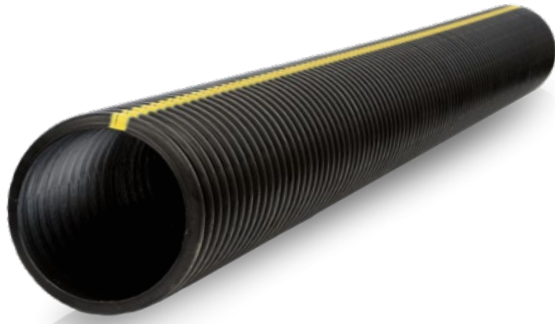

GOLDFLO®
Plain End Dual-Wall

GOLDFLO® is a high density polyethylene plastic pipe manufactured to the stringent requirements of AASHTO M294 and ASTM F2306, ensuring you receive a quality, high performance product. GOLDFLO® is available with a soil tight joint configuration in 4"- 36".

Plain End Available Sizes

Diameter (in.)	Number	Nominal Length
4"	04GF20NP	20'
6"	06GF20NP	20'
8"	08GF20NP	20'
10"	10GF20NP	20'
12"	12GF20NP	20'
15"	15GF20NP	20'
18"	18GF20NP	20'
24"	24GF20NP	20'
30"	30GF20NP	20'
36"	36GF20NP	20'

(Pipe is available perforated.)



Green Fact:

The carbon footprint of HDPE is considerably smaller than concrete because it requires less energy to manufacture, transport and install.

MOBILE RESOURCES



More about GOLDFLO WT & GOLDFLO

- Installation Videos
- Installation Documents
- Specifications
- Technical Notes

Prinsco.com/goldflowt-agresources




Prinsco.com/goldflo-agresources



ENGINEERED WITH INTEGRITY

Prinsco products are fully supported by our engineering team and are designed, manufactured and tested to meet/exceed the high performance needs of the construction market. Prinsco's engineering, quality control and production teams are committed to a continuous process of innovation, product development and quality improvement. We are focused on current and future market needs centered around environmental sustainability, water quality, stormwater management and performance advancement.



GOLDLINE®



ECOFLO® 100



GOLDFLEX™



FITTINGS



CONTROLLED DRAINAGE