

Onsite Chamber Comparison Sheet


Onsite Chambers perform two key functions:

- Provide a means to distribute and dispose of primarily and secondarily treated effluent into the soil.
- Provide adequate storage volume to accommodate incoming flows.


Onsite chambers accomplish this by providing the necessary open bottom area, louvered sidewall, and storage capacity via structural arch design.

Prinsco Pro4® chambers offer equivalent or greater open bottom area and louvered sidewall height compared to existing chambers.

Performance

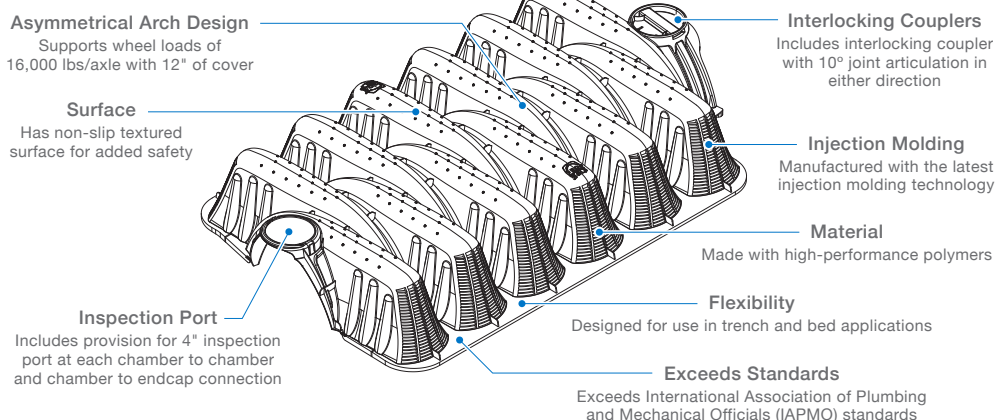

Versatility

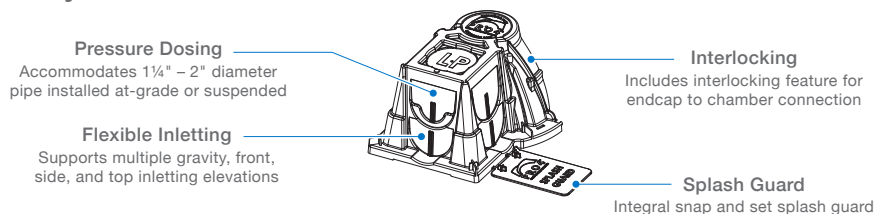

	Prinsco Pro4®/36LP	IWT Quick4 Plus Standard Low Profile ¹	IWT Arc 36 LP ¹
Height	8"	8"	8"
Width	34"	34"	34"
Effective Length	48"	48"	60"
Weight	3.5 lbs/ft	2.9 lbs/ft	2.8 lbs/ft
Invert Height	0.5", 3.3", 8.8"	3.3", 9.6"	3.8"
Louver Height	6.5"	6.3"	5.5"
Open Bottom Area	2.4 ft ² /ft	2.4 ft ² /ft	2.4 ft ² /ft
Storage Capacity	8.0 gal/ft	8.0 gal/ft	8.74 gal/ft
Bearing Footprint Area	56 in ² /ft	53 in ² /ft	52 in ² /ft
Load Rating	H-10	H-10	H-10

¹ Infiltrator Water Technology's published values

The trademarks Quick4 Plus and Arc 36 LP are registered trademarks of Infiltrator Water Technologies, LLC, in which Prinsco, Inc. claims no ownership interest.