



NOTES:

1. REFER TO TABLE 1 FOR DETAILS. CIRCULAR CUT OUT POINT IS LOCATED AT THE CENTER OF EACH HS31 CHAMBER.
2. TAPPED CONNECTION CAN CONSIST OF QWIKSEAL OR APPROVED ENGINEERING EQUIVALENT.
3. PVC FITTING CAN CONSIST OF BELL OR OTHER CONNECTION WHICH PREVENTS PIPE FROM SLIDING INTO THE CHAMBER. ALL PVC FITTINGS TO BE SOLVENT CEMENTED.
4. PVC MAY BE EITHER SDR 35 OR SCH 40.
5. HOLES SHOULD BE CUT WITH A HOLE SAW. IF NEEDED, START WITH SMALLER SIZE AND SLOWLY CUT OUT MORE EVENLY FROM SIDES UNTIL TIGHT FIT OF CONNECTION IN HOLE.

TABLE 1

CORED HOLE SIZE ESTIMATES (CONFIRM DIMENSIONS PRIOR TO CUTTING)		
CONNECTION	4" (100 mm) PVC INSPECTION PORT	6" (150 mm) PVC INSPECTION PORT
SDR 35*	~4-1/4" (108 mm) hole on circular cut out pt.	~6-3/8" (162 mm) hole centered on corrugation crest.
SCH 40*	~4-5/8" (117 mm) hole on circular cut out pt.	~6-3/4" (172 mm) hole centered on corrugation crest.
QWIKSEAL	5" (127 mm) hole centered on corrugation crest. P/N: QS-4	7" (180 mm) hole centered on corrugation crest. P/N: QS-6
EZ-TEE	4-1/2" (114 mm) hole centered on corrugation crest.	6-1/2" (165 mm) hole centered on corrugation crest.

*CONFIRM O.D. OF PIPE PRIOR TO CUTTING TO ENSURE HOLE IS TIGHT FITTING AROUND PVC PIPE. CUT HOLE TO MATCH O.D. AS CLOSE AS POSSIBLE.

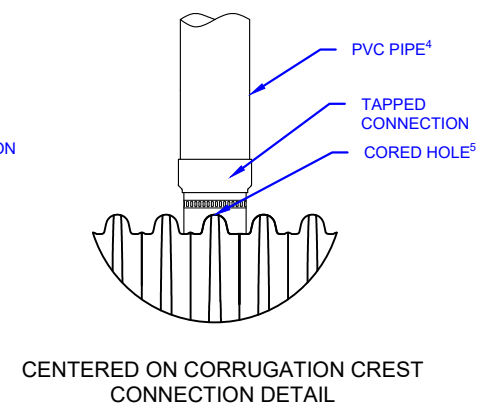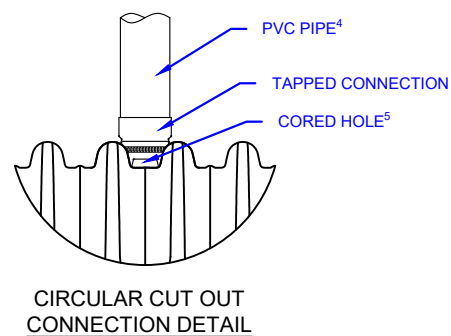

THIS DETAIL DEPICTS RECOMMENDED INSTALLATION PRACTICES AND IS NOT INTENDED TO SUPERSEDE ANY NATIONAL, STATE OR LOCAL SPECIFICATIONS. PRINSCO BEARS NO RESPONSIBILITY FOR ANY ALTERATIONS, REVISION AND/OR DEVIATION FROM THIS STANDARD DETAIL. PRINSCO HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICE FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION TO VERIFY SUITABILITY. © PRINSCO, INC.



1717 16TH ST. NE
WILLMAR, MN 56201
www.prinsco.com

TITLE: HYDROSTOR HS31 - INSPECTION PORT		
DRAWN BY: RMA	DATE: 07-Aug-25	DRAWING NUMBER:
SCALE: NTS	SHEET: 1 OF 1	D-7-403